
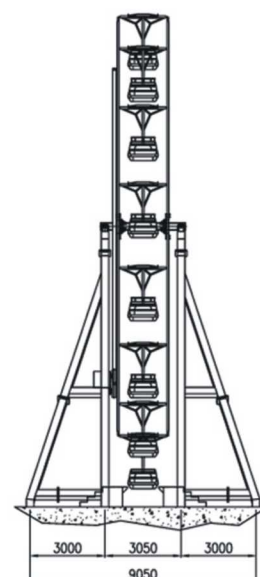


The attraction is made up of a round vertical structure and, depending on the version, of 16 or 20 vehicles loading 4 or 6 passengers each. The imponent structure of the Ferris Wheel is supported by two towers to be fixed to the concrete foundations.

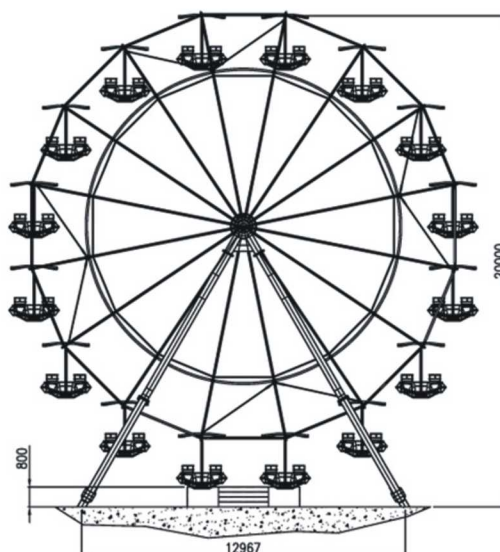

## FERRIS WHEELS 20 MT

<b>Park model</b>	Available
<b>Road model</b>	Available
<b>Height:</b>	20 mt (66 ft)
<b>Width:</b>	20 mt (66 ft)
<b>Depth:</b>	10 mt (33 ft)
<b>Lanes:</b>	16 cars, 64 passengers
<b>Loading:</b>	2 o 3 cars each time
<b>Estimated capacity:</b>	1000 passengers/hour
<b>Requirement for city line connection:</b>	50 KW
<b>Voltage:</b>	380 V ± 5% 3 Ph. + N (other versions on request)
<b>Frequency:</b>	50/60 Hz ± 2%
<b>Trasport road model:</b>	2 semitrailers 16,2 mt(53 ft)
<b>Trasport park model:</b>	6x40' open top + 1x20' box